

# Double stage Lateral Channel Blowers Compressor - 50Hz X2.42 SM



## Main Features


- Compliance with the ATEX Directive 94/9/EC
- Compliance with the Machinery Directive 2006/42/CE
- Maximum flow: 420 m<sup>3</sup>/h
- Maximum Pressure: 600 mbar
- Aluminium alloy parts non sparking
- Motors ATEX Ex nA IIB T4 Gc with PTC sensor, suitable for use with frequency converters (Inverters)
- Suitable for horizontal and vertical installation (for Biogas application, only vertical)
- Inlet / Outlet ports: G 4+

## For Biogas application (to be listed at order)

- Anodizing
- Impregnation
- Provision for pressure and temperature control sensors
- Drain holes
- Only vertical installation with No. 3 vibration dampers included (Refer to the doc: "Overall dimensions for Biogas application")

## MARKING


- **Zone 2, Cat 3G (GAS)**
  - CE II 3G c IIB T4
- **Zone 22, Cat 3D (DUST)**
  - CE II 3D c T135°C
- **For Biogas application**
  - Zone 2, Cat 3G (GAS)**
    - CE II 3G cb IIB T3

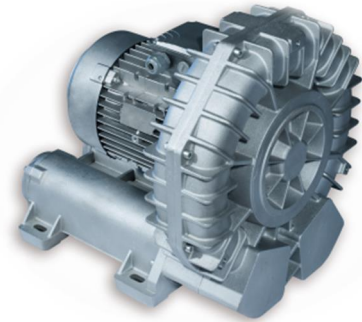

## Technical Data for 50Hz - 2 poles - Three-Phase Motors <sup>(5)</sup>

Order Code	Maximum flow [m <sup>3</sup> /h]	Maximum Differential Pressure $\Delta p$ [hPa]	Electric Motor data			Noise level Lp <sup>(3)</sup> [dB (A)]	Weight [kg]
			Installed Power [kW]	Voltage <sup>(2)</sup> $\Delta/Y$ [V]	Rated Amps $\Delta/Y$ [A]		
<b>X2.42-7.5</b>	420	325	7,5	400/690	14,9 / 8,6	79,5	95
<b>X2.42-9.2</b>	420	425	9,2	400/690	17,6 / 13,1	80,0	100
<b>X2.42-11.0</b>	420	525	11,0	400/690	20,5 / 11,9	80,5	102
<b>X2.42-15.0</b>	420	600	15,0	400/690	29,2 / 16,9	81,0	105


## Performance Diagrams [50Hz] <sup>(1)</sup>

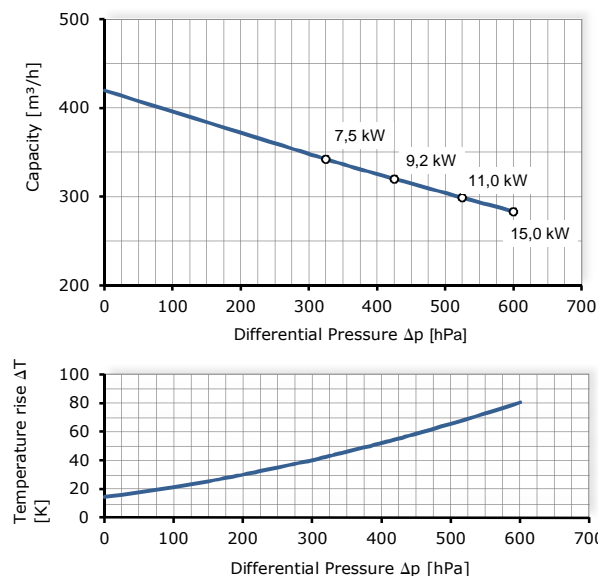

### Notes:

- (1) Performance curves refer to operative conditions to air at 15°C temperature and 1013 hPa (abs) pressure measured at inlet port. Tolerance on capacity and temperature values: +/-10%. 1 hPa = 1 mbar
- (2) Allowed tolerance for supplied voltage: +/-10%.
- (3) Noise measured at 1 meter distance in accordance to EN ISO 3744, tolerance: +/-3 dB (A).
- (4) Tolerance about dimensions according to: ISO 2768-c.
- (5) For use with frequencies different from 50Hz, refer to variable frequency table.

## Overall Dimensions [mm] <sup>(4)</sup>

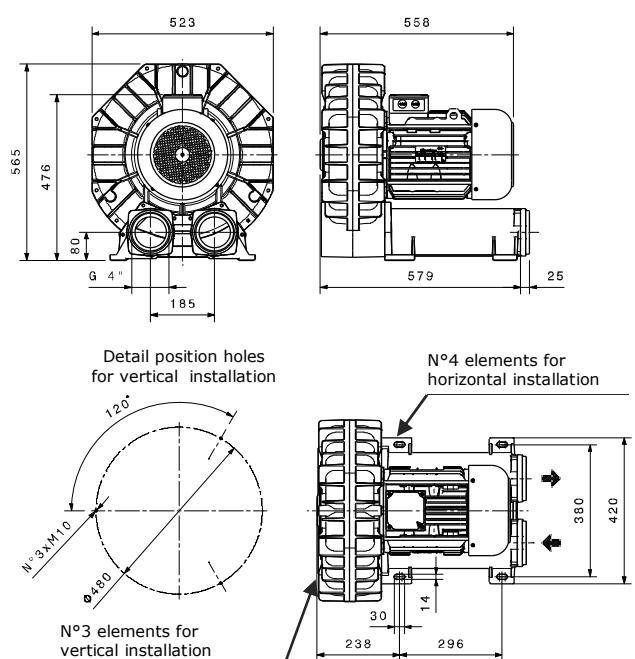

For proper installation and safe use of the blower it must be equipped with relief valve and air filter in accordance with 94/9/EC Atex Directive.  
For further details ask for the Compressor connection diagram.